

## NORMACLAMP® – Hose Clamps

### NORMACLAMP® SVS – Quick Release Clamps

NORMACLAMP® SVS and NORMACLAMP® SVSP provide safe and flexible solutions in applications where the fast and frequent assembly and disassembly of connections is required, for example in filter and bottling plants or in piping systems in food and beverage industries which need constant cleaning.

### Short description of technical features



**1** Safe locking system can be manually locked and unlocked without using a tool

**2** Bridge = optimal hose protection

### Materials

W1	W2	W3	W4	W5
x			x*	x

\* only light version


## NORMACLAMP® – Hose Clamps

### Clamp Types



NORMACLAMP® SVS and SVSP quick release clamps feature a secure catch which can easily be locked and opened with one hand. A special assembly tool is not required.

The light version is equipped with a metric cylinder head screw.

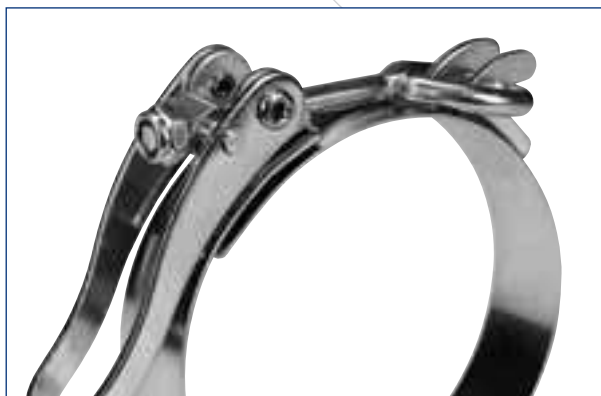

Alternatively, the catch can be fitted with an eye screw, provided the quantity ordered is large enough.

NORMACLAMP® SVS and NORMACLAMP® SVSP clamps are manufactured in standard band widths and materials. Sizes are increased in 1 mm steps.

Up to 300 mm clamping diameter they are supplied in rolled up form. From 301 mm diameter they are supplied in flat form.

### The advantages at a glance

- Closure is manually locked and opened
- No assembly tool required

# NORMACLAMP® – Hose Clamps



## Technical features

### Corrosion resistance



Material	Corrosion resistance in salt spray testing
W1	Min. 72 h
W4	Min. 240 h



### Quick release clamps SVS

Band width (mm)	Min. ø (mm)	Max. ø (mm)	s		Screws					Clamping force
			W1	W4	(0e)	Zy 	Sk 	M		
15	80	800	1.0	0.6	(•)	•	—	6	80 N	
20	80	800	1.0	0.8	(•)	•	—	6	80 N	
25	80	800	1.5	1.0	(•)	•	—	6	80 N	

### Quick release clamps SVSP

Band width	Min. ø	Max. ø	s		Screws				Clamping force
			W1	W4	(Oe)	Zy 	Sk 	M	
15	80	800	1.0	0.6	(•)	•	—	6	80 N
20	80	800	1.0	0.8	(•)	•	—	6	80 N
25	80	800	1.5	1.0	(•)	•	—	6	80 N

Oe = Eye screw

## NORMACLAMP® – Hose Clamps

### Survey of sizes, band widths & materials NORMACLAMP® SVS

Dia- meter in mm	Band width			W1	W4
	15 mm	20 mm	25 mm		
80–90	X	X	X	X	X
up to 100	X	X	X	X	X
up to 110	X	X	X	X	X
up to 120	X	X	X	X	X
up to 130	X	X	X	X	X
up to 140	X	X	X	X	X
up to 150	X	X	X	X	X
up to 160	X	X	X	X	X
up to 170	X	X	X	X	X
up to 180	X	X	X	X	X
up to 190	X	X	X	X	X
up to 200	X	X	X	X	X
up to 210	X	X	X	X	X
up to 220	X	X	X	X	X
up to 230	X	X	X	X	X
up to 240	X	X	X	X	X
up to 250	X	X	X	X	X
up to 260	X	X	X	X	X
up to 270	X	X	X	X	X
up to 280	X	X	X	X	X
up to 290	X	X	X	X	X
up to 300	X	X	X	X	X

Larger diameters on request

#### Enquiries/ordering:

When making enquiries or placing an order please indicate as follows:

	1. Type	2. Diameter	3. Band width	4. Material	5. Screw	6. Version
Example	SVS	120	25	W1	ZY	light